

RECEIVED  
MAR 14 2003  
GROUP 1700

Patent Office  
Canberra

I, LISA TREVERROW, MANAGER AUSTRALIAN RECEIVING OFFICE,  
hereby certify that the annexed is a true copy of International Application  
PCT/AU00/000352 filed at the Australian receiving office on 20 April 2000.

I further certify that this International Application claims priority from  
Provisional Application PP 9850 filed on 20 April 1999.

WITNESS my hand this  
Twenty-fourth day of February 2003



*Lisa Treverrow*

LISA TREVERROW  
MANAGER  
AUSTRALIAN RECEIVING OFFICE

PCT

## REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty

For receiving Office use only

PCT/AU 00 / 00352

International Application No.

20 APR 2000

(20.04.00)

International Filing Date

Australian Patent Office

PCT INTERNATIONAL APPLICATION

Name of receiving Office and "PCT International Application"

Applicant's or agent's file reference  
(if desired) (12 characters maximum) 27837WOP00

Box No. I TITLE OF INVENTION  
MEMBRANE FILTRATION MANIFOLD SYSTEM

Box No. II APPLICANT

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

USF Filtration and Separations Group Inc  
2118 Greenspring Drive  
Timonium  
Maryland, 21093  
United States of America

 This person is also inventor.Telephone No.  
(612) 4577 0960Facsimile No.  
(612) 4577 6315

Teleprinter No.

State (that is, country) of nationality:  
USState (that is, country) of residence:  
USThis person is applicant  
for the purposes of: all designated  
States all designated States except  
the United States of America the United States of  
America only the States indicated in  
the Supplemental Box

Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

JOHNSON, Warren Thomas  
8 Scarsborough Crescent  
Bligh Park, NSW 2756  
Australia

This person is:

applicant only  
 applicant and inventor  
 inventor only (if this check-box is marked, do not fill in below.)

State (that is, country) of nationality:  
AUState (that is, country) of residence:  
AUThis person is applicant  
for the purposes of: all designated  
States all designated States except  
the United States of America the United States of  
America only the States indicated in  
the Supplemental Box Further applicants and/or (further) inventors are indicated on a continuation sheet.

Box No. IV AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE

The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

BALDWIN SHELSTON WATERS  
60 MARGARET STREET  
SYDNEY NSW 2000  
AUSTRALIA

 agent  common representativeTelephone No.  
(612) 9777 1111Facsimile No.  
(612) 9241 4666

Teleprinter No:

Address for correspondence: Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.

See Notes to the request form

## Continuation of Box No III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

If none of the following sub-boxes is used, this sheet is not to be included in the request.

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

STOLLERY, Gary William  
5/22 West Market Street  
Richmond, NSW 2753  
Australia

This person is:

applicant only  
 applicant and inventor  
 inventor only (if this check-box is marked, do not fill in below.)

State (that is, country) of nationality:  
AUState (that is, country) of residence:  
AUThis person is applicant  
for the purposes of: all designated  
States all designated States except  
the United States of America the United States of  
America only the States indicated in  
the Supplemental Box

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

BILTOFT, Bruce Gregory  
51 Park Avenue  
Chatswood, NSW 2067  
Australia

This person is:

applicant only  
 applicant and inventor  
 inventor only (if this check-box is marked, do not fill in below.)

State (that is, country) of nationality:  
AUState (that is, country) of residence:  
AUThis person is applicant  
for the purposes of: all designated  
States all designated States except  
the United States of America the United States of  
America only the States indicated in  
the Supplemental Box

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

COX, David John  
18/5-7 Norton Street  
Ashfield, NSW 2131  
Australia

This person is:

applicant only  
 applicant and inventor  
 inventor only (if this check-box is marked, do not fill in below.)

State (that is, country) of nationality:  
AUState (that is, country) of residence:  
AUThis person is applicant  
for the purposes of: all designated  
States all designated States except  
the United States of America the United States of  
America only the States indicated in  
the Supplemental Box

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

McMAHON, Robert James  
10 Conder Street  
Burwood, NSW 2134  
Australia

This person is:

applicant only  
 applicant and inventor  
 inventor only (if this check-box is marked, do not fill in below.)

State (that is, country) of nationality:  
AUState (that is, country) of residence:  
AUThis person is applicant  
for the purposes of: all designated  
States all designated States except  
the United States of America the United States of  
America only the States indicated in  
the Supplemental Box Further applicants and/or (further) inventors are indicated on a continuation sheet.

See Notes to the request form

## Continuation of Box No III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

If none of the following sub-boxes is used, this sheet is not to be included in the request.

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

WOOD, David  
33 Alexandra Street  
Hunters Hill, NSW 2110  
Australia

This person is:

applicant only  
 applicant and inventor  
 inventor only (if this check-box is marked, do not fill in below.)

State (that is, country) of nationality:

AU

This person is applicant  
for the purposes of: all designated  
States all designated States except  
the United States of America the United States of  
America only the States indicated in  
the Supplemental BoxState (that is, country) of residence:  
AU

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

ERNST, Leon Keith  
73 Anderson Road  
Mortdale, NSW 2223  
Australia

This person is:

applicant only  
 applicant and inventor  
 inventor only (if this check-box is marked, do not fill in below.)

State (that is, country) of nationality:

AU

This person is applicant  
for the purposes of: all designated  
States all designated States except  
the United States of America the United States of  
America only the States indicated in  
the Supplemental BoxState (that is, country) of residence:  
AU

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

This person is:

applicant only  
 applicant and inventor  
 inventor only (if this check-box is marked, do not fill in below.)

State (that is, country) of nationality:

State (that is, country) of residence:

This person is applicant  
for the purposes of: all designated  
States all designated States except  
the United States of America the United States of  
America only the States indicated in  
the Supplemental Box

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

This person is:

applicant only  
 applicant and inventor  
 inventor only (if this check-box is marked, do not fill in below.)

State (that is, country) of nationality:

State (that is, country) of residence:

This person is applicant  
for the purposes of: all designated  
States all designated States except  
the United States of America the United States of  
America only the States indicated in  
the Supplemental Box Further applicants and/or (further) inventors are indicated on a continuation sheet.

Form PCT/RO/101 (continuation sheet) (January 1999)

See Notes to the request form

## Box No. V DESIGNATION OF STATES

The following designations are hereby made under Rule 4.9(a) (mark the applicable check-boxes; at least one must be marked):

## Regional Patent

AP ARIPO Patent: GH Ghana, GM Gambia, KE Kenya, LS Lesotho, MW Malawi, SD Sudan, SL Sierra Leone, SZ Swaziland, TZ United Republic of Tanzania, UG Uganda, ZW Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT

EA Eurasian Patent: AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakhstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT

EP European Patent: AT Austria, BE Belgium, CH and LI Switzerland and Liechtenstein, CY Cyprus, DE Germany, DK Denmark, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden, and any other State which is a Contracting State of the European Patent Convention and of the PCT

OA OAPI Patent: BF Burkina Faso, BJ Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, GA Gabon, GN Guinea, GW Guinea-Bissau, ML Mali, MR Mauritania, NE Niger, SN Senegal, TD Chad, TG Togo, and any other State which is a member State of OAPI and a Contracting State of the PCT (if other kind of protection or treatment desired, specify on dotted line)

National Patent (if other kind of protection or treatment desired, specify on dotted line):

<input checked="" type="checkbox"/> AE United Arab Emirates	<input checked="" type="checkbox"/> LR Liberia
<input checked="" type="checkbox"/> AL Albania	<input checked="" type="checkbox"/> LS Lesotho
<input checked="" type="checkbox"/> AM Armenia	<input checked="" type="checkbox"/> LT Lithuania
<input checked="" type="checkbox"/> AT Austria	<input checked="" type="checkbox"/> LU Luxembourg
<input checked="" type="checkbox"/> AU Australia	<input checked="" type="checkbox"/> LV Latvia
<input checked="" type="checkbox"/> AZ Azerbaijan	<input checked="" type="checkbox"/> MA Morocco
<input checked="" type="checkbox"/> BA Bosnia and Herzegovina	<input checked="" type="checkbox"/> MD Republic of Moldova
<input checked="" type="checkbox"/> BB Barbados	<input checked="" type="checkbox"/> MG Madagascar
<input checked="" type="checkbox"/> BG Bulgaria	<input checked="" type="checkbox"/> MK The former Yugoslav Republic of Macedonia
<input checked="" type="checkbox"/> BR Brazil	<input checked="" type="checkbox"/> MN Mongolia
<input checked="" type="checkbox"/> BY Belarus	<input checked="" type="checkbox"/> MW Malawi
<input checked="" type="checkbox"/> CA Canada	<input checked="" type="checkbox"/> MX Mexico
<input checked="" type="checkbox"/> CH and LI Switzerland and Liechtenstein	<input checked="" type="checkbox"/> NO Norway
<input checked="" type="checkbox"/> CN China	<input checked="" type="checkbox"/> NZ New Zealand
<input checked="" type="checkbox"/> CR Costa Rica	<input checked="" type="checkbox"/> PL Poland
<input checked="" type="checkbox"/> CU Cuba	<input checked="" type="checkbox"/> PT Portugal
<input checked="" type="checkbox"/> CZ Czech Republic	<input checked="" type="checkbox"/> RO Romania
<input checked="" type="checkbox"/> DE Germany	<input checked="" type="checkbox"/> RU Russian Federation
<input checked="" type="checkbox"/> DK Denmark	<input checked="" type="checkbox"/> SD Sudan
<input checked="" type="checkbox"/> DM Dominica	<input checked="" type="checkbox"/> SE Sweden
<input checked="" type="checkbox"/> EE Estonia	<input checked="" type="checkbox"/> SG Singapore
<input checked="" type="checkbox"/> ES Spain	<input checked="" type="checkbox"/> SI Slovenia
<input checked="" type="checkbox"/> FI Finland	<input checked="" type="checkbox"/> SK Slovakia
<input checked="" type="checkbox"/> GB United Kingdom	<input checked="" type="checkbox"/> SL Sierra Leone
<input checked="" type="checkbox"/> GD Grenada	<input checked="" type="checkbox"/> TJ Tajikistan
<input checked="" type="checkbox"/> GE Georgia	<input checked="" type="checkbox"/> TM Turkmenistan
<input checked="" type="checkbox"/> GH Ghana	<input checked="" type="checkbox"/> TR Turkey
<input checked="" type="checkbox"/> GM Gambia	<input checked="" type="checkbox"/> TT Trinidad and Tobago
<input checked="" type="checkbox"/> HR Croatia	<input checked="" type="checkbox"/> TZ United Republic of Tanzania
<input checked="" type="checkbox"/> HU Hungary	<input checked="" type="checkbox"/> UA Ukraine
<input checked="" type="checkbox"/> ID Indonesia	<input checked="" type="checkbox"/> UG Uganda
<input checked="" type="checkbox"/> IL Israel	<input checked="" type="checkbox"/> US United States of America
<input checked="" type="checkbox"/> IN India	<input checked="" type="checkbox"/> UZ Uzbekistan
<input checked="" type="checkbox"/> IS Iceland	<input checked="" type="checkbox"/> VN Viet Nam
<input checked="" type="checkbox"/> JP Japan	<input checked="" type="checkbox"/> YU Yugoslavia
<input checked="" type="checkbox"/> KE Kenya	<input checked="" type="checkbox"/> ZA South Africa
<input checked="" type="checkbox"/> KG Kyrgyzstan	<input checked="" type="checkbox"/> ZW Zimbabwe
<input checked="" type="checkbox"/> KP Democratic People's Republic of Korea	Check-boxes reserved for designating States which have become party to the PCT after issuance of this sheet:
<input checked="" type="checkbox"/> KR Republic of Korea	<input checked="" type="checkbox"/> DZ Algeria
<input checked="" type="checkbox"/> KZ Kazakhstan	<input checked="" type="checkbox"/> AG Antigua and Barbuda
<input checked="" type="checkbox"/> LC Saint Lucia	
<input checked="" type="checkbox"/> LK Sri Lanka	

**Precautionary Designation Statement:** In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. (Confirmation (including fees) must reach the receiving Office within the 15-month time limit.)

See Notes to the request form

Box No. VI PRIORITY CLAIM		<input type="checkbox"/> Further priority claims are indicated in the Supplemental Box		
Filing date of earlier application (day/month/year)	Number of earlier application	national application: country	Where earlier application is: regional application: * regional Office	international application: receiving Office
item (1) 20 April 1999 (20.04.99)	PP9850	AU		
item (2)				
item (3)				

The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) (only if the earlier application was filed with the Office which for the purposes of the present international application is the receiving Office) identified above as (1)

\* Where the earlier application is an ARIPO application, it is mandatory to indicate in the Supplemental Box at least one country party to the Paris Convention for the Protection of Industrial Property for which that earlier application was filed (Rule 4.10(b)(ii). See Supplemental Box.

#### Box No. VII INTERNATIONAL SEARCHING AUTHORITY

Choice of International Searching Authority (ISA)  
(if two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used):  
ISA /

Request to use results of earlier search; reference to that search (if an earlier search has been carried out by or requested from the International Searching Authority):

Date (date/month/year) Number Country (or regional Office)  
16 July 1999 PP9850 AU

#### Box No. VIII CHECK LIST; LANGUAGE OF FILING

This international application contains the following number of sheets:

request : 5  
Description (excluding sequence listing part) : 11  
claims : 4  
abstract : 1  
drawings : 16  
Sequence listing part of description : —  
Total number of sheets : 37

This international application is accompanied by the item(s) marked below:

1.  fee calculation sheet
2.  separate signed power of attorney
3.  copy of general power of attorney; reference number, if any:
4.  statement explaining lack of signature
5.  priority document(s) identified in Box No. VI as item(s):
6.  translation of international application into (language):
7.  separate indications concerning deposited microorganism or other biological material
8.  nucleotide and/or amino acid sequence listing in computer readable form
9.  other (other specify):


Figure of the drawings which should accompany the abstract:

1

Language of filing of the international application: English

#### Box No. IX SIGNATURE OF APPLICANT OR AGENT

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request).



Peter R Heathcote  
BALDWIN SHELSTON WATERS

For receiving Office use only

1. Date of actual receipt of the purported international application:

20 APR 2000 (20.04.00)

3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:

4. Date of timely receipt of the required corrections under PCT Article 11(2):

5. International Searching Authority specified by the applicant:

ISA/

6.  Transmittal of search copy delayed until search fee is paid

2. Drawings:

received:

not received:

For International Bureau use only

Date of receipt of the record copy by the International Bureau:

See Notes to the request form

## TITLE: MEMBRANE FILTRATION MANIFOLD SYSTEM

## TECHNICAL FIELD

The present invention relates to membrane filtration manifold systems. More particularly, the invention relates to membrane filtration manifold systems for hollow fibre membrane filters comprising elongate bundles of hollow fibre membranes, wherein feed to be filtered is fed to the outside of the bundles of fibres and filtrate is extracted from the end or ends of the fibre lumens. The systems also preferably incorporate a cleaning facility for periodic cleansing of the feed surfaces of the fibres.

10 The invention has been developed primarily for use in a membrane filtration system which is open to atmospheric pressure and will be described hereinafter with reference to this application. However, it will be appreciated that the invention is not limited to this particular field of use.

## 15 BACKGROUND ART

Typical prior art filtration manifolds are employed in filtration systems of the type described above. These filtration systems generally include elongate tubular cartridges enclosing a bundle of the hollow fibre membranes. Manifold or header arrangements are used to connect the cartridges, usually at one or both ends, these manifolds acting to separate and divert the respective flows of the contaminated feed, 20 filtrate and cleaning fluid through the system. In this regard, cross-flow systems typically have two feed manifolds (inlet and re-circulation outlet) and one or two filtrate manifolds. In cross-flow filtration systems of the prior art the feed stream to be filtered flows tangential to or across the surface of the membrane. This generates a sweeping action at the membrane surface, keeping the surface cleaner. Conversely, systems 25 configured for dead end operations utilise only one feed inlet manifold and one filtrate

- 2 -

outlet manifold during filtration mode. Further, these prior art manifolds or header arrangements are often configured to facilitate the construction of modular two or three dimensional cartridge arrays.

Most typically, the prior art filtration systems, as previously described, are closed to the atmosphere. In such systems, fluid to be filtered, hereinafter referred to as feed, is fed under positive pressure to the filters. In order for this type of system to operate effectively, the elongate tubular filtration cartridges are encased in pressure tight housings. Such housings are then connected to a manifold system which both separates the feed from the filtrate and supports the pressure tight housing. The manifold system may also serve to introduce cleaning fluid to the filtration system.

Prior art filtration systems, as previously described, may also be open to the atmosphere. Typically in such systems, feed is drawn through the membranes under negative pressure. This is achieved by applying a negative, or suction, pressure on the filtrate side of the membrane. Such systems tend to employ less infrastructure and capital works compared with systems closed to the atmosphere as they do not require components that are able to contain relatively higher pressures. For example, there is no need to encase filtration cartridges in individual pressure tight housings in systems open to atmosphere. Typically in these systems, the filtration cartridges are merely substantially immersed in an open tank containing the feed. In such systems it is desirable that an appropriate manifold be provided to both support the filter cartridges and to allow the filtrate to be drawn from the filter while separating the feed from the filtrate. Similarly, as with closed systems, such a manifold may also serve the purpose of supporting a cleaning fluid system.

Prior art filtration systems and their associated filtration cartridges referred to above are often a complex configuration of pipes and parts which are difficult and time

consuming to assemble. Further more, the actual manifold system components of the

prior art filtration systems are often a complex assembly of parts in themselves.

The prior art filtration systems described above also require regular testing to

assess system integrity. Non-integrity may be due to failure of individual filtration

5 membrane hollow fibres, 'o'-rings or other system components. Integrity testing often

requires the removal of either individual system components or filtration cartridges.

This removal is often difficult in typical prior art filtration manifolds. Furthermore, as

previously discussed, typical prior art filtration manifolds may contain many complex

parts. It then follows that integrity testing of these parts can also be time consuming.

10 It is an object of the present invention to provide a filtration manifold system of

the kind herein described which overcomes or ameliorates at least some of the

deficiencies of the prior art or at least offers a useful alternative thereto.

#### SUMMARY OF THE INVENTION

15 According to one aspect of the invention there is provided a membrane filtration

manifold for connecting a filter submodule of the kind including one or more elongate

bundles of semipermeable polymeric fibres, said manifold including:

a housing; and

at least one submodule connecting collar connected with said housing, said collar

20 being adapted to receive and locate said submodule having a connecting sleeve with a

locking formation whereby the submodule can be secured at one end with the collar by a

clip means adapted to engage both said collar and said locking formation to prevent axial

withdrawal of said submodule from said collar.

Preferably, said locking formation includes a circumferential flange formed on

25 said sleeve.

- 4 -

Also, in a preferred form, the housing and collars of the manifold include passageways for fluid communication between the housing and collars. Further preferably, the housing includes a removable cap for fluid-tight sealing engagement with the housing.

5 According to a second aspect of the invention there is provided a membrane

filtration apparatus including:

a filter submodule of the kind including one or more elongate bundles of semipermeable polymeric fibres;

10 a headpiece removably connected at one end of said filter submodule; and a basepiece removably connected to the other end of said filter submodule;

10 said headpiece being a membrane filtration manifold according to the first aspect of the invention.

According to a third aspect of the invention there is provided a membrane

filtration apparatus bank including:

15 a plurality of membrane filtration apparatuses according to the second aspect of the invention;

a filtrate conduit connected to at least one membrane filtration apparatus; and a cleaning fluid conduit connected to at least one membrane filtration apparatus. Preferably, the module groups are arranged in an upright position, said filtrate conduit being proximally above said headpieces and said cleaning fluid conduit being 20 proximally above said basepieces.

According to a fourth aspect of the invention there is provided a membrane filtration apparatus array including a plurality of membrane filtration apparatus banks according to the third aspect of the invention connected in parallel by an array filtrate conduit.

According to another aspect of the invention there is provided a membrane filtration apparatus array train including:

- a train conduit; and
- a plurality of membrane filtration apparatus arrays according to the fourth aspect

5 of the invention connected in fluid communication with said train conduit.

#### BRIEF DESCRIPTION OF THE FIGURES

A preferred embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

10 Figure 1 is a perspective view of a membrane filtration manifold according to the invention;

Figure 2 is another perspective view of the membrane filtration manifold of Figure 1;

15 Figure 3 is a sectional view showing a submodule connected to a manifold collar by a locking clip;

Figure 4a is an isometric view of the preferred embodiment of the clip;

Figure 4b is an isometric view of the preferred embodiment of the clip of Figure 4a;

Figure 4c is an isometric view of an alternate embodiment of the clip;

20 Figure 5 is a cross sectional side elevation of the locking clip of Figure 4a;

Figure 6a is a detail view of the collar;

Figure 6b is another detail view of the collar;

Figure 7a is a plan view of an embodiment of the connecting sleeve for filtration modules;

25 Figure 7b is a sectional view of the connecting sleeve of Figure 8a taken on line

A-A of Figure 7a;

Figure 7c is a side elevation of the connecting sleeve of Figure 7a;

Figure 8a is a plan view of an alternate embodiment of the connecting sleeve for filtration modules;

5 Figure 8b is a sectional view of the connecting sleeve of Figure 8a taken on line

B-B of Figure 8a;

Figure 8c is a side elevation of the connecting sleeve of Figure 8a;

Figure 9a is a perspective view of a cap;

Figure 9b is another perspective view of the cap of Figure 9a;

10 Figure 10 is a perspective view of the membrane filtration manifold of Figure 1

showing the cap of Figure 9a in use;

Figure 11 is a side elevation of a membrane filtration apparatus bank;

Figure 12a is a side cross sectional elevation of an embodiment of the membrane

filtration manifold in basepiece configuration, showing cleaning fluid flow from the

15 cleaning fluid conduit through the basepiece;

Figure 12b is a front cross sectional elevation of an embodiment of the membrane filtration manifold in basepiece configuration, showing cleaning fluid flow from the cleaning fluid conduit through the basepiece;

Figure 13 is a plan view of a membrane filtration apparatus array;

20 Figure 14 is a perspective view showing one membrane filtration apparatus bank in a membrane filtration apparatus array; and

Figure 15 is an isometric view of a membrane filtration apparatus train.

#### PREFERRED EMBODIMENTS OF THE INVENTION

25 Referring to the drawings, the membrane filtration manifold system includes a

membrane filtration manifold 1 for connecting filter submodules 2 of the kind comprising elongate bundles of hollow fibre membranes. As best shown in Figures 1 and 2, the preferred embodiment of the manifold includes a housing 3 connected with four submodule connecting collars 4.

Referring to Figure 3, the collars 4 are adapted to receive and locate submodules

5 2 having a connecting sleeve 5 with a locking flange 6. In this embodiment, the

submodule 2 can be secured at one end with its respective collar 4 by a clip 7 which simultaneously engages the submodule 2 and locking flange 6 to prevent axial

10 withdrawal of the submodule 2 from the collar 4. The locking flange 6 further engages

bearingly with a lip 8 of the collar 4. Engaging and releasing the clip 7 enables

substantially simple respective assembly and removal of the submodules 2 from the

manifold 1. The manifold 1 further includes filtrate passageways 9 for fluid

communication between the housing 3 and collars 4 and cleaning fluid passageways 10

for cleaning fluid communication with a cleaning fluid conduit 11.

15 Figures 4a, 4b and 5 show the preferred embodiment of the clip 7. The clip 7 has

a substantially cylindrical sidewall 12 with a top and bottom flange 13 and 14, each of

which projects radially inwardly from the sidewall 12. The clip 7 is split in a line

parallel to the central axis of the submodule 2 to allow radial expansion of the clip when

slid axially into and out of locking engagement with the collar 4. Radial expansion is

20 achieved by manually parting a pair of projections 40 provided on the top flange 13 of

the clip, on either side of the split respectively. Furthermore, the clip 7 is resiliently

biased to enable radial contraction of the clip when the clip snap-lockingly engages with

both the submodule 2 and collar 4. When the clip is employed to engage both the

submodule and the locking flange, bottom flange 14 locks over the submodule flange 6

25 and top flange 13 bearingly engages with the lip 8. Furthermore, the collar 4 has a

stepped seat 15 for locking engagement with top flange 13.

Figure 4c shows an alternate embodiment of the clip 7. This embodiment has additional projections 41 to aid in the manual removal of the clip 7 from both the submodule 2 and collar 4. The additional projections 41 extend radially from the sidewall 12 of the clip 7, on either side of the split of the sidewall 12.

5 sidewall 12 of the clip 7, on either side of the split of the sidewall 12.

Figures 7a-c and 8a-c show embodiments of the submodule connection

Figures 7a-c and 8a-c show embodiments of the submodule connection sleeves 5. These Figures show detail of the flange 6 and 'o'-ring seat channel 17

features of the connection sleeves 5. One side 18 of the flange 6 is for bearing engagement with the collar 4 and a second side 19 is for locking engagement with the

10 submodule connection sleeve 5 shown in Figures 7a-c. Further, the embodiment of the submodule connection sleeve 5 shown in Figures 7a-c, has one channel 17 for use as an 'o'-ring seat, while the embodiment of the

submodule connection sleeve 5 shown in Figures 8a-c, has two channels 17 for use as

'o'-ring seats.

The manifold 1 may also include a removable cap 20, for fluid-tight sealing engagement with the housing. The preferred embodiment of the cap, shown in Figures

15 9a and 9b, includes a disc 21 with an axially extending threaded shaft 22 mounted to its centre on one side. The disc 21 also has projections 23 on the other side to facilitate

manual turning of the cap 20. The cap will be described in more detail below.

20 A radially spaced flange 24 extends axially outwardly from the cap 20 on the same side of the cap as the shaft 22. This flange allows fluid tight sealing engagement of

25 the cap 20 with the housing 1. Figure 10 shows the preferred embodiment of the cap 20 in use.

In another embodiment of the invention shown in Figure 11, a membrane filtration apparatus 25 includes a headpiece 26 and a basepiece 27, each being an embodiment of the membrane filtration manifold 1 as described above, and connected to

four membrane filter submodules 2. Each headpiece 26 connects to a filtrate conduit 28 allowing fluid communication between each headpiece 26 and the filtrate conduit 28.

The cap 20 is not required when the membrane filtration manifold 1 is used as a headpiece 26. Absence of the cap 20 allows fluid communication between the manifold 1 and the filtrate conduit 28.

Further, as seen particularly in Figures 12a and 12b, each basepiece 27 is connected to a cleaning fluid conduit 11 allowing fluid communication between each basepiece 27 and the cleaning fluid conduit 11. When the membrane filtration manifold 1 is used as a basepiece 27, the threaded shaft 22 of the cap 20 is threadedly engaged with a corresponding bore on the cleaning fluid conduit 11. Also, in the preferred embodiment, the clip 7 is not required to lock the submodule 2 to the basepiece. This is because the submodule 2 will be held in its respective collar 4 of its basepiece 27, both by gravity and by virtue of the top of the submodule being held in place in its headpiece 26 and a clip 7.

In an alternate embodiment of the invention, the shaft 22 is hollow with an internal threaded portion. In this embodiment, rather than threadedly engaging with a bore in the cleaning fluid conduit, the shaft 22 internally threadedly engages with a complementary shaft projecting in a perpendicular direction from the cleaning fluid conduit 11.

In another embodiment of the invention, a membrane filtration apparatus bank 29 includes a plurality of membrane filtration apparatus 25 as described above wherein each headpiece 26 is connected to a filtrate conduit 28 and each basepiece 27 is connected to a cleaning fluid conduit 11. Additional stiffening elements 30, as shown in Figure 11, may also be provided therebetween to aid physical stability of the filtration system.

Typically, there are eight membrane filtration apparatuses 25 in each bank 29 and the

apparatuses are arranged in an upright position. When employed in a filtration system, the bank 29 is substantially immersed in the feed, where the feed is contained in a tank 31 with an open top.

Preferably, air is used as the filtration submodule cleaning fluid which flows

5 through the cleaning fluid conduit 11. As best shown in Figures 11, 12a and 12b, the cleaning fluid conduit 11 is proximally above the basepieces 27 and lies in a straight line along the length of the bank 29 in between the collars 4. This allows the cleaning fluid conduit 11 to supply air to the basepieces 27 through a plurality of passageways 10 on the under side of the cleaning fluid conduit 11. Supplying air to the basepieces 27

10 through the underside of the cleaning fluid conduit 11 allows controlled release of the cleaning air, ensuring it is evenly distributed along the entire length of the bank 29.

In another embodiment of the invention, the filtration system includes a membrane filtration apparatus array as shown in Figures 11 and 13 having a plurality of apparatus banks 29 wherein each of the filtrate conduits 28 are connected to an array

15 filtrate conduit 32.

The filtration apparatus banks 29 are further adapted for relatively simple disconnection from the membrane filtration apparatus array. When disconnected, the filtration apparatus banks may be removed from the membrane filtration apparatus array by lifting the bank vertically from the array. Similarly, the banks may also be placed

20 individually into an array by lowering the banks vertically into its predetermined position. This allows for less complicated assembly and disassembly of the arrays and convenient access to submodules disposed in or near the centre of the array.

In a further embodiment of the invention, a membrane filtration array train, as best shown in Figure 15, includes a plurality of membrane filtration apparatus arrays

25 from Figure 14 wherein the array filtrate conduits 32 are connected by a train conduit 33

such that the array filtrate conduits 32 are in fluid communication with the train conduits 33.

During filtration the tanks 31 are continuously substantially filled with feed which in turn submerges the arrays of filter submodules 2. Pumps 34 draw the feed 5 through the filter submodules 2 producing filtrate. The filtrate under negative pressure from the pumps 34, travels through the manifolds 1, via the filtrate conduits 28, array filtrate conduits 32, and train filtrate conduits 33 and on to the pump. The filtrate then leaves the pump and also the filtration system via a filtrate exit conduit 35.

Although the invention has been described with reference to specific examples 10 and to filtration manifolds used in filtration systems open to atmosphere, it will now be appreciated by those skilled in the art that the invention may be embodied in many other forms including filtration manifolds used in filtration systems closed to atmosphere.

## CLAIMS:

1. A membrane filtration manifold for connecting a filter submodule of the kind including one or more elongate bundles of semipermeable polymeric fibres, said manifold including:
  - 5 a housing; and at least one submodule connecting collar connected with said housing, said collar being adapted to receive and locate said submodule having a connecting sleeve with a locking formation whereby the submodule can be secured at one end with the collar by a clip means adapted to engage both said collar and said locking formation to prevent axial withdrawal of said submodule from said collar.
  - 10 2. A manifold according to claim 1 wherein said housing is in fluid communication with said collar.
  3. A manifold according to claim 1 or 2 wherein said collar has an internal stepped seat for bearing engagement with said secured end of said submodule.
  - 15 4. A manifold according to any one of the preceding claims wherein said locking formation includes a radially outwardly directed circumferential flange formed on said sleeve.
  5. A manifold according to any one of the preceding claims wherein said clip means is cylindrical having a side wall split to define opposed wall edges.
  - 20 6. A manifold according to claim 5 wherein said clip means includes a top radially inwardly directed circumferential flange adjacent the top of said side wall for bearing engagement with said radially outwardly directed flange formed on said sleeve.
  7. A manifold according to claim 5 or 6 wherein said side wall includes a bottom radially inwardly directed circumferential flange at or adjacent the bottom of said side wall for bearing engagement with a complementary step on said collar.
  - 25

8. A manifold according to any one of claims 5 to 7 wherein said clip means includes projections on said side wall adjacent respective said opposed edges.
9. A manifold according to claim 8 wherein said projections extend longitudinally from said top flange.
- 5 10. A manifold according to any one of claims 6 to 9 wherein said top flange is partially circumferential.
11. A manifold according to any one of the preceding claims wherein said clip is hingedly connectable to said collar.
12. A manifold according to any one of the preceding claims wherein said clip means 10 is mutually interengageable with said collar.
13. A manifold according to any one of the preceding claims wherein said clip means is adapted for over-centred circumferential locking engagement with a said collar.
14. A manifold according to any one of the preceding claims including four submodule connecting collars.
- 15 15. A manifold according to claim 14 wherein said collars are disposed in a common plane and have parallel axes.
16. A manifold according to claim 14 or 15 wherein one end of said housing is adjacent each collar and the axis of said housing is parallel to the axes of said collars.
17. A membrane filtration apparatus including:
  - 20 a filter submodule of the kind including one or more elongate bundles of semipermeable polymeric fibres;
  - a headpiece removably connected at one end of said filter submodule; and
  - a basepiece removably connected to the other end of said filter submodule;
  - said headpiece being a membrane filtration manifold according to any one of the
- 25 preceding claims.

18. A membrane filtration apparatus according to claim 17, wherein said basepiece is a membrane filtration manifold according to any one of claims 1 to 16.

19. A membrane filtration apparatus according to claim 17 or 18, wherein said headpiece is adapted for connection to a filtrate conduit allowing fluid communication between said headpiece and said filtrate conduit and said basepiece is adapted for connection to a cleaning fluid conduit allowing fluid communication between said basepiece and said cleaning fluid conduit.

20. A membrane filtration apparatus according to claim 19 wherein said collars are configured to allow placement of said cleaning fluid conduit at least partially between two pairs of said collars.

21. A membrane filtration apparatus according to any one of claims 17 to 20 wherein said basepiece includes a removable cap for fluid-tight sealing engagement with the other end of said housing.

22. A membrane filtration apparatus bank including:

15 a plurality of membrane filtration apparatuses according to any one of claims 17 to 21; a filtrate conduit connected to at least one membrane filtration apparatus; and a cleaning fluid conduit connected to at least one membrane filtration apparatus.

23. A membrane filtration apparatus bank according to claim 22 wherein said membrane filtration apparatuses are arranged in an upright position, said filtrate conduit being proximally above said headpieces and said cleaning fluid conduit being proximally above said basepieces.

24. A membrane filtration apparatus bank according to claim 23 wherein said cleaning fluid conduit is at least partially disposed between two pairs of submodule collars and is in fluid communication with said housing.

- 15 -

25. A membrane filtration apparatus bank according to any one of claims 22 to 24 wherein said cleaning fluid conduit is in fluid communication with said basepiece via an aperture in said cleaning fluid conduit to allow cleaning fluid to pass from said cleaning fluid conduit to said submodules via said basepiece.

5 26. A membrane filtration apparatus bank according to any one of claims 22 to 25 wherein said housing of said headpiece is in fluid communication with said filtrate conduit.

27. A membrane filtration apparatus array including a plurality of membrane filtration apparatus banks according to any one of claims 22 to 26 connected in parallel 10 by an array filtrate conduit.

28. A membrane filtration apparatus array according to claim 27 wherein said array is adapted for insertion into an open feed tank.

29. A membrane filtration apparatus array train including:  
15 a train conduit; and

a plurality of membrane filtration apparatus arrays according to claim 27 or 28 connected in fluid communication with said train conduit.

## ABSTRACT

A membrane filtration manifold (1) for connecting a filter submodule (2) of the kind including one or more elongate bundles of semipermeable polymeric fibres is disclosed. The manifold (1) includes a housing (3) and at least one submodule connecting collar (4) connected with said housing (3). The collar (4) is adapted to receive and locate the submodule (2), where the submodule has a connecting sleeve (5) with a locking formation (6). In this way, the submodule (2) can be secured at one end with the collar (4) by a clip means (7) adapted to engage both the collar and the locking formation to prevent axial withdrawal of the submodule from the collar.

Also disclosed is a membrane filtration apparatus (25) including a filter submodule (2) of the kind including one or more elongate bundles of semipermeable polymeric fibres. The apparatus further includes a headpiece (26) removably connected at one end of said filter submodule (2) and a basepiece (27) removably connected to the other end of said filter submodule. In this embodiment, the headpiece (26) is an aforementioned membrane filtration manifold (1).

Further disclosed is a membrane filtration apparatus bank (29); a membrane filtration apparatus array; and a membrane filtration apparatus array train, each of which employs the use of an aforementioned membrane filtration apparatus in fluid communication with a filtrate conduit (28) and a cleaning fluid conduit (11).

1/16

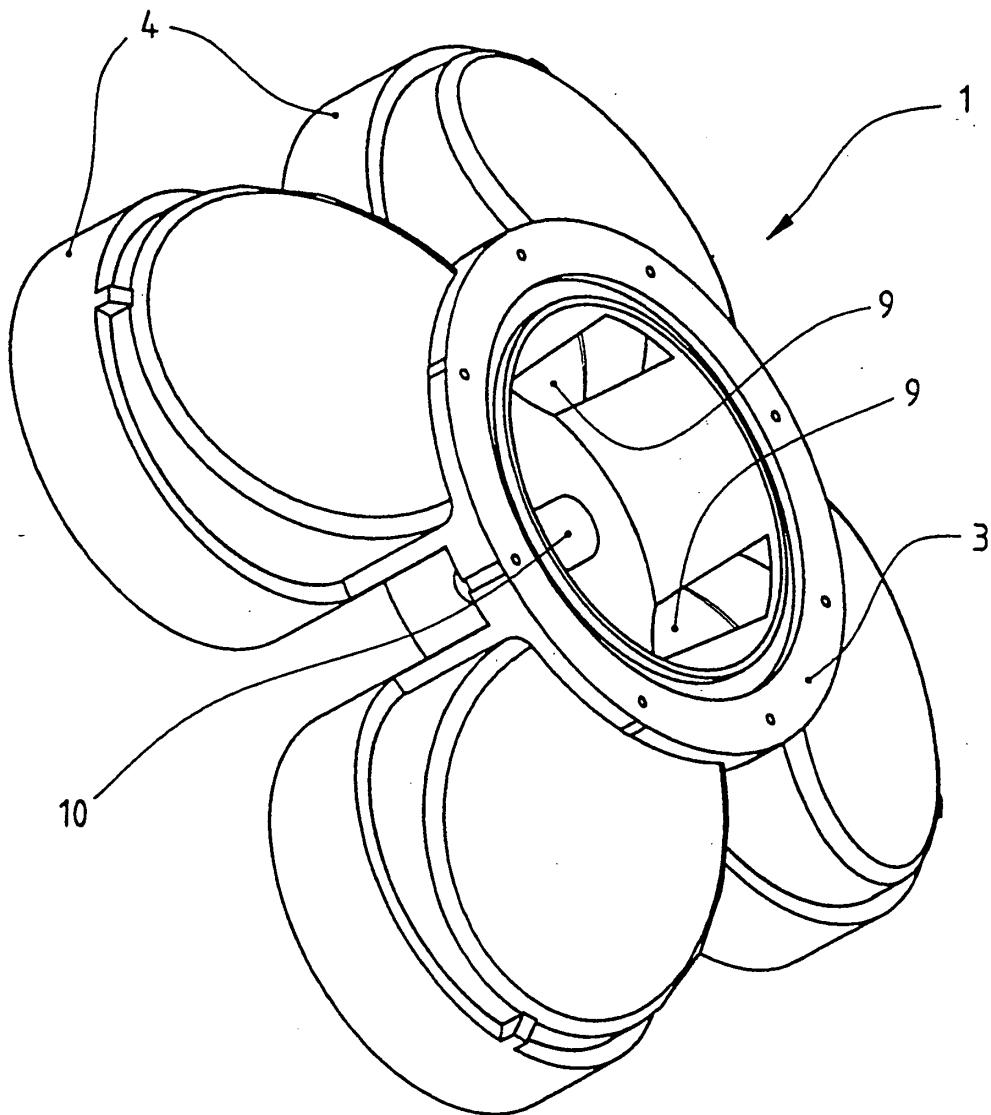


FIG 1

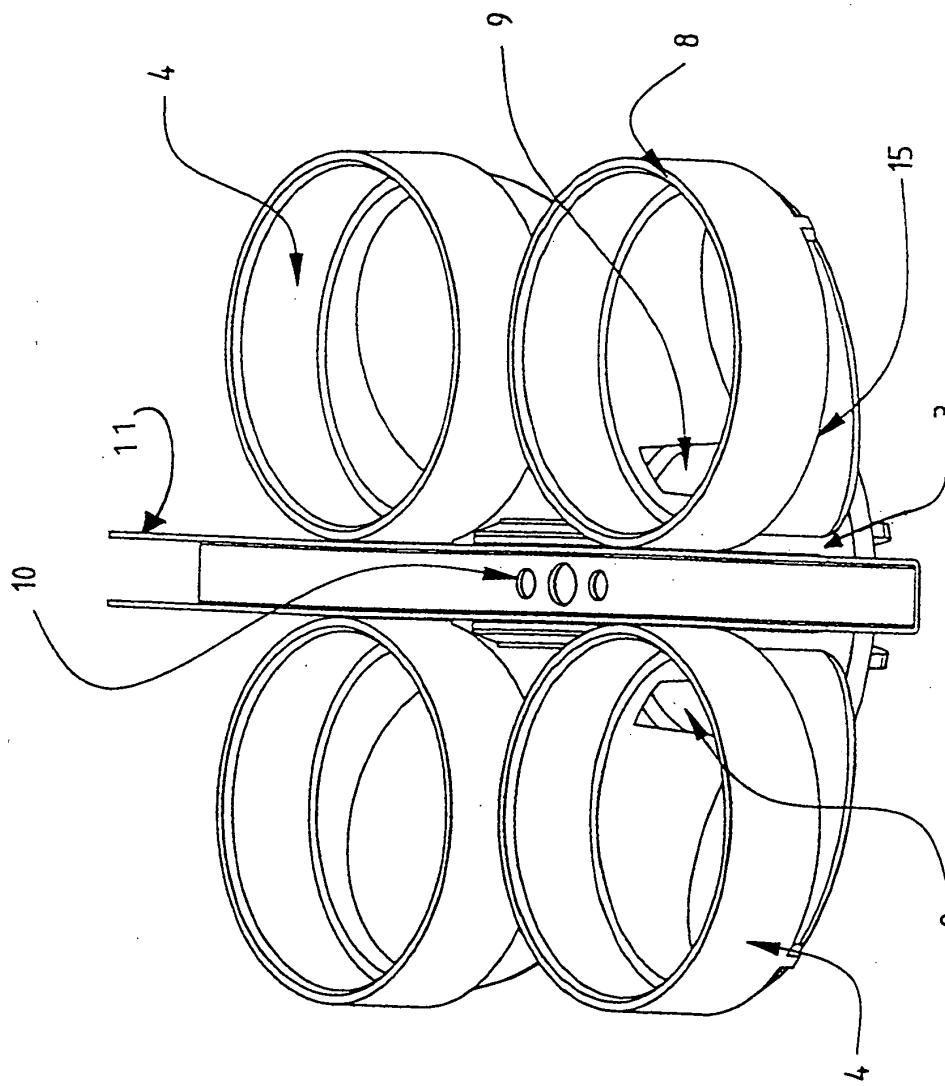


FIG 2


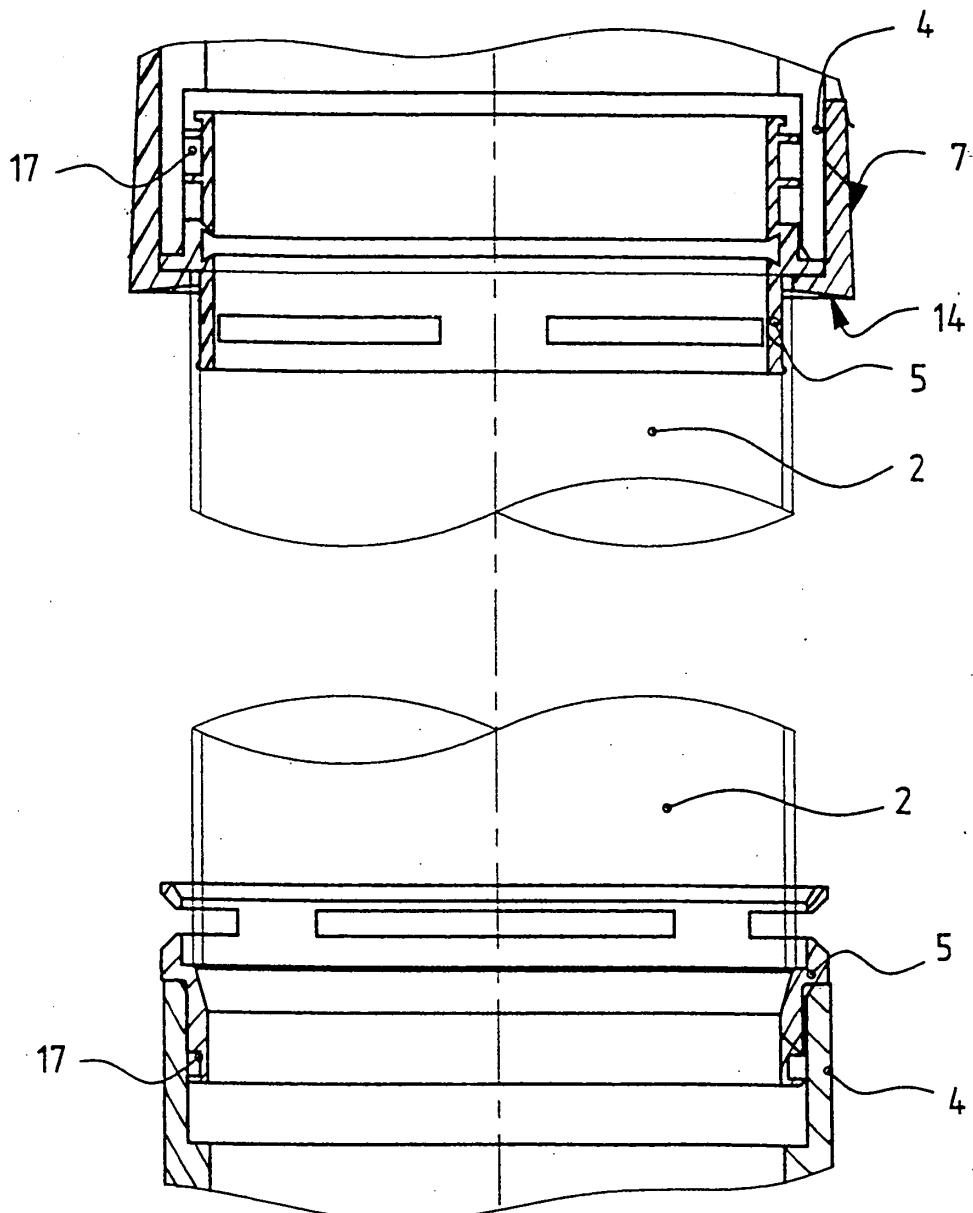


FIG 3

4/16

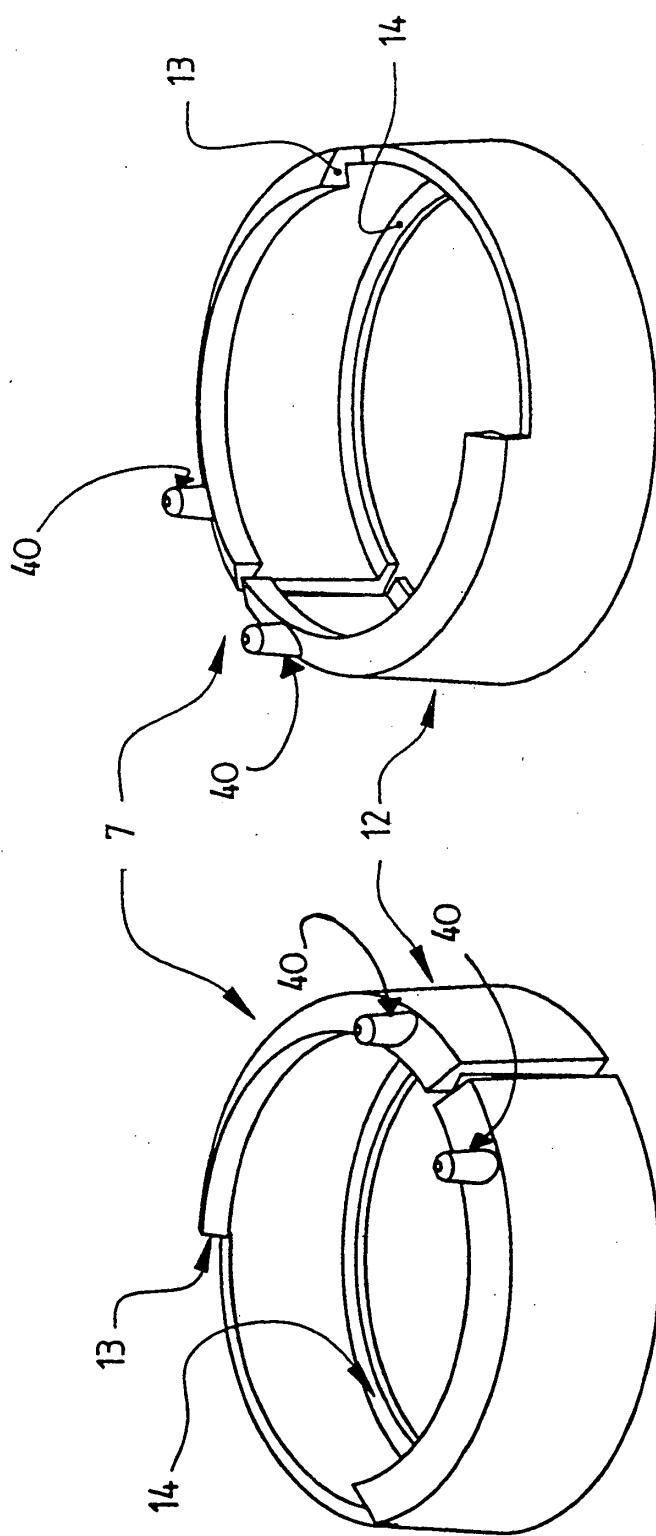

5/16

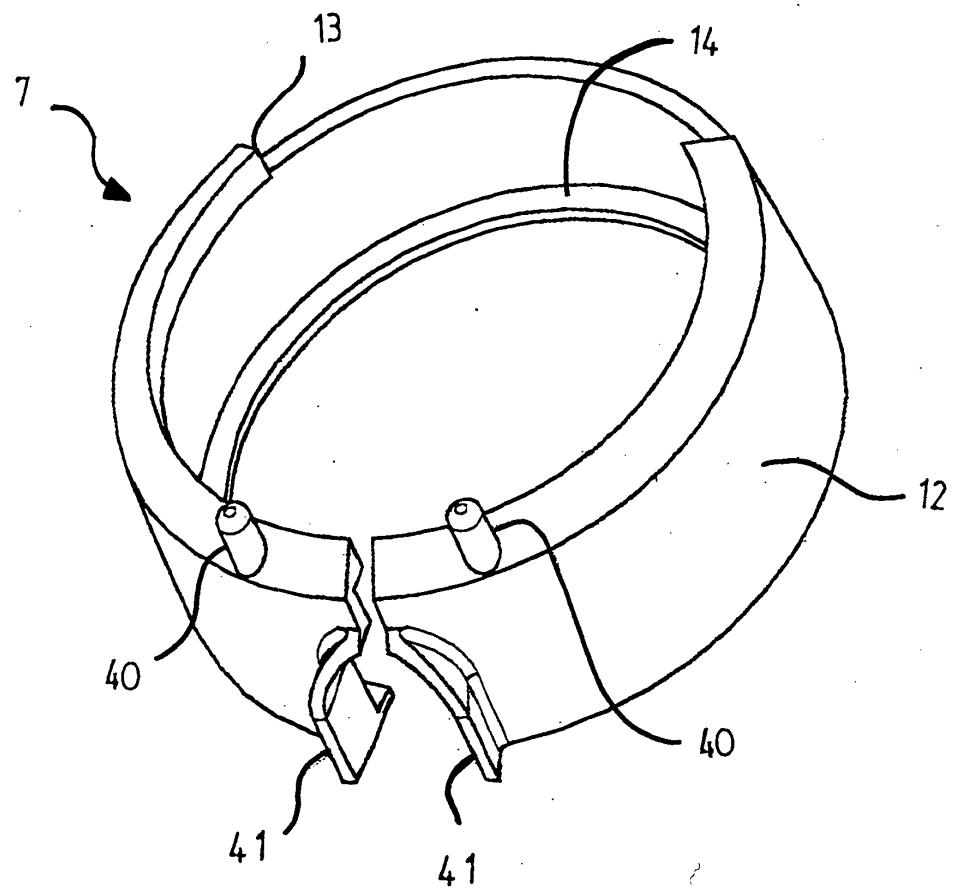


FIG 4c

6/16

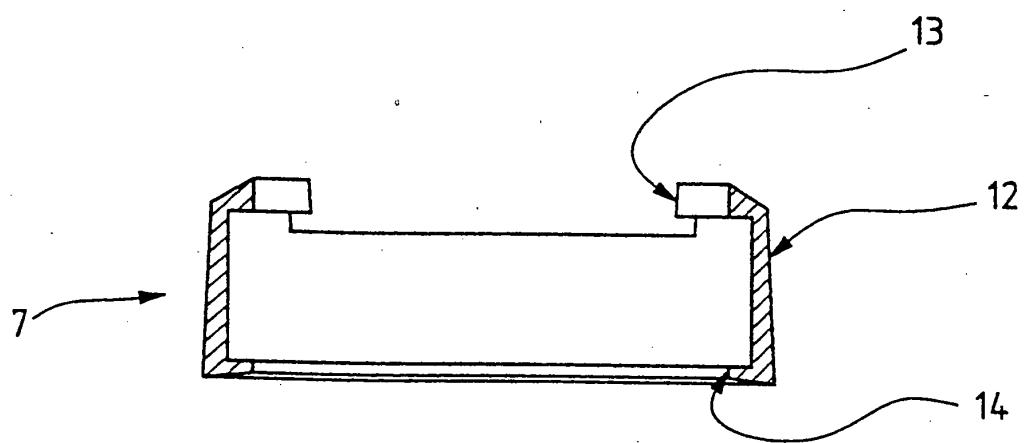


FIG 5

7/16

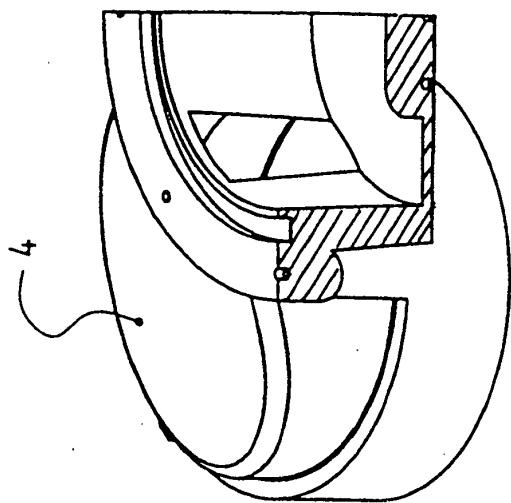


FIG 6b

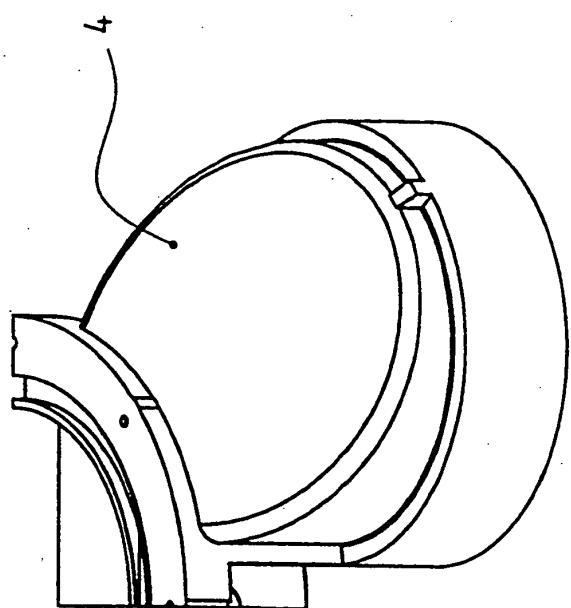


FIG 6a

8/16

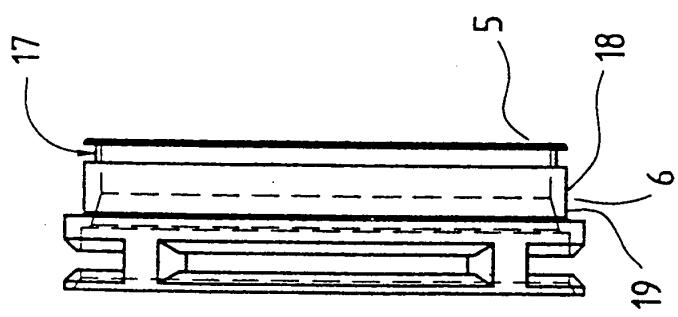


FIG 7c

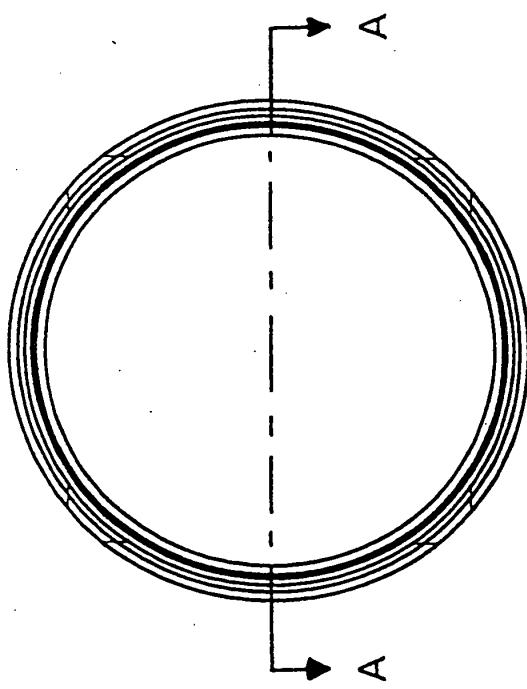


FIG 7a

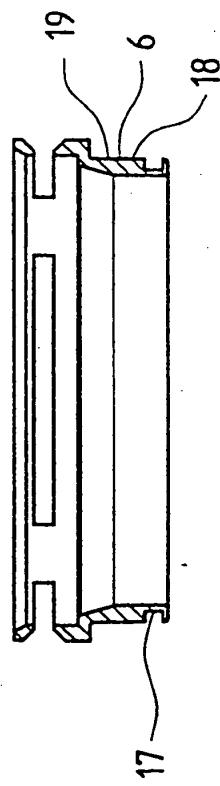


FIG 7b

FIG 8C

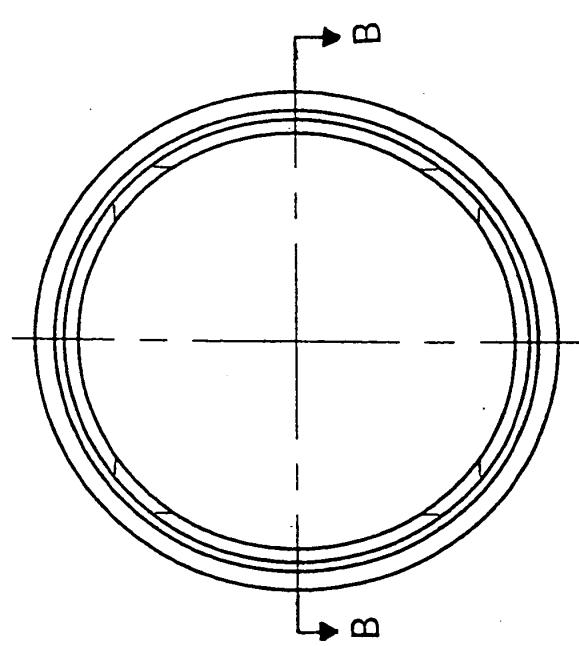
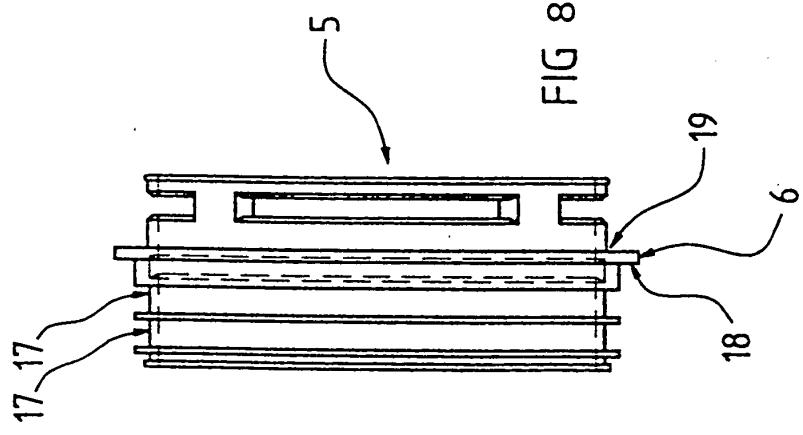


FIG 8a


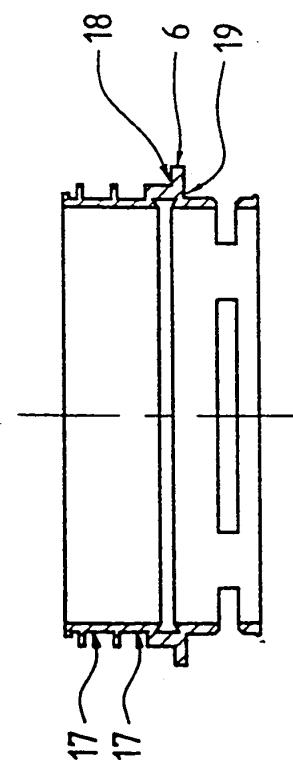


FIG 8b

10/16

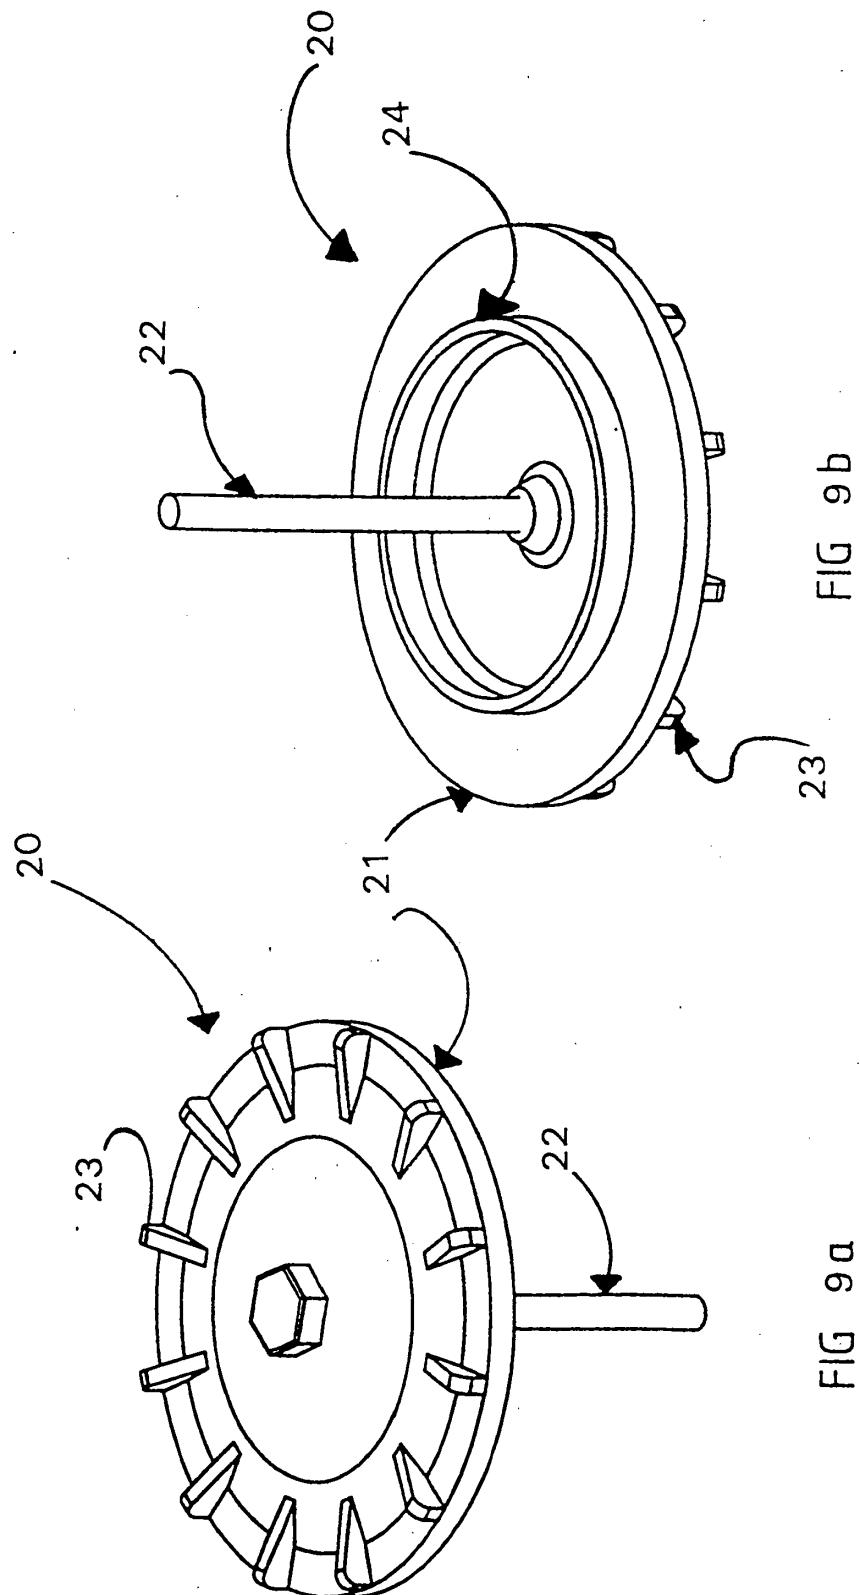

11/16

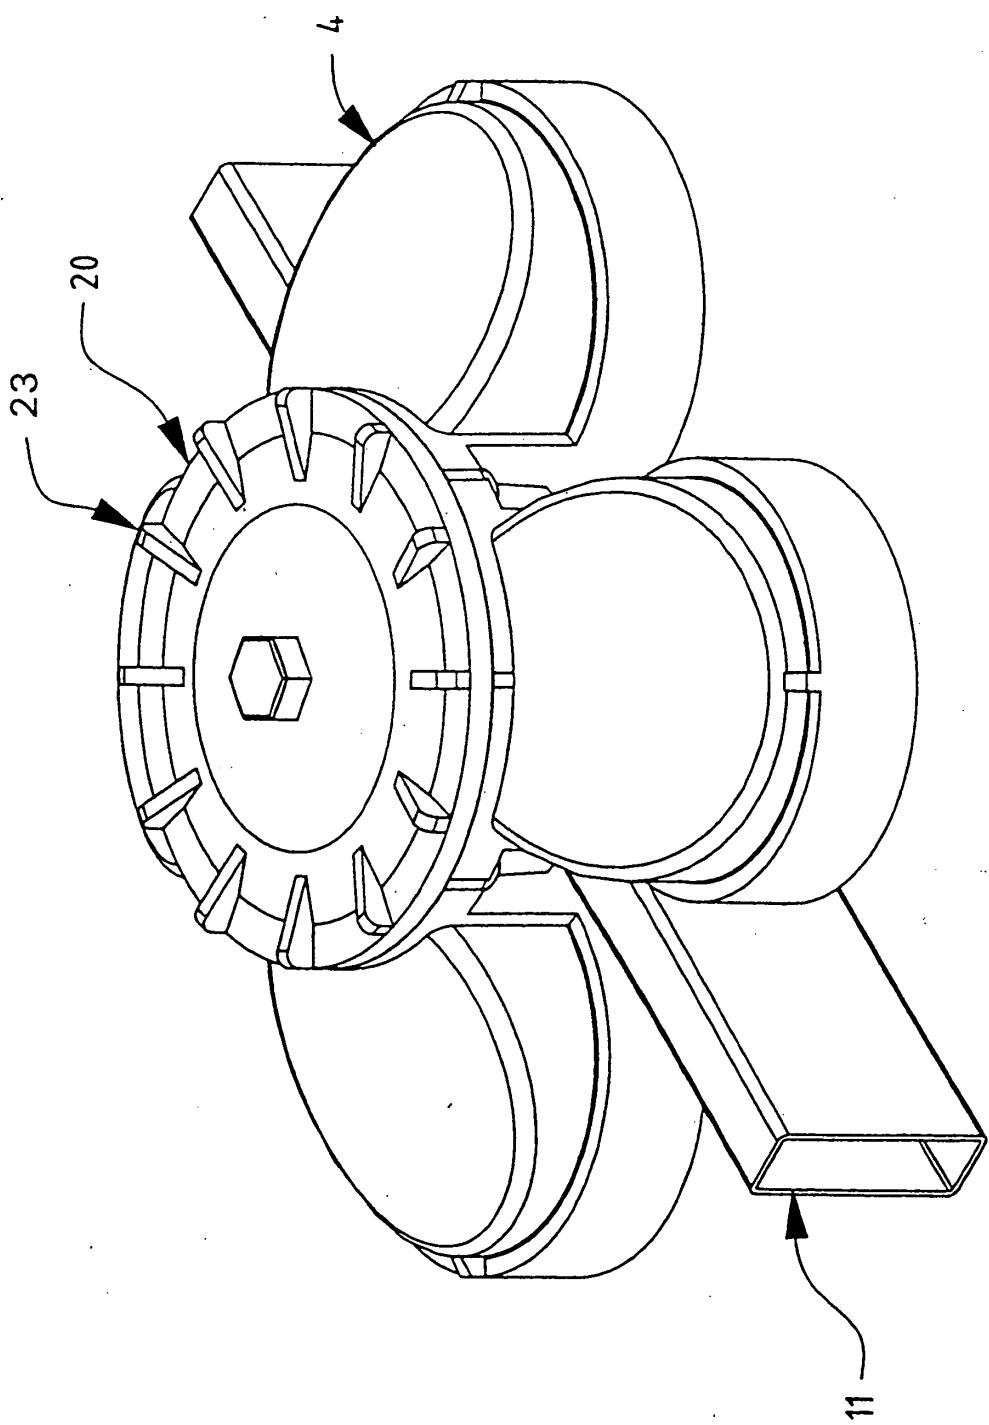


FIG 10

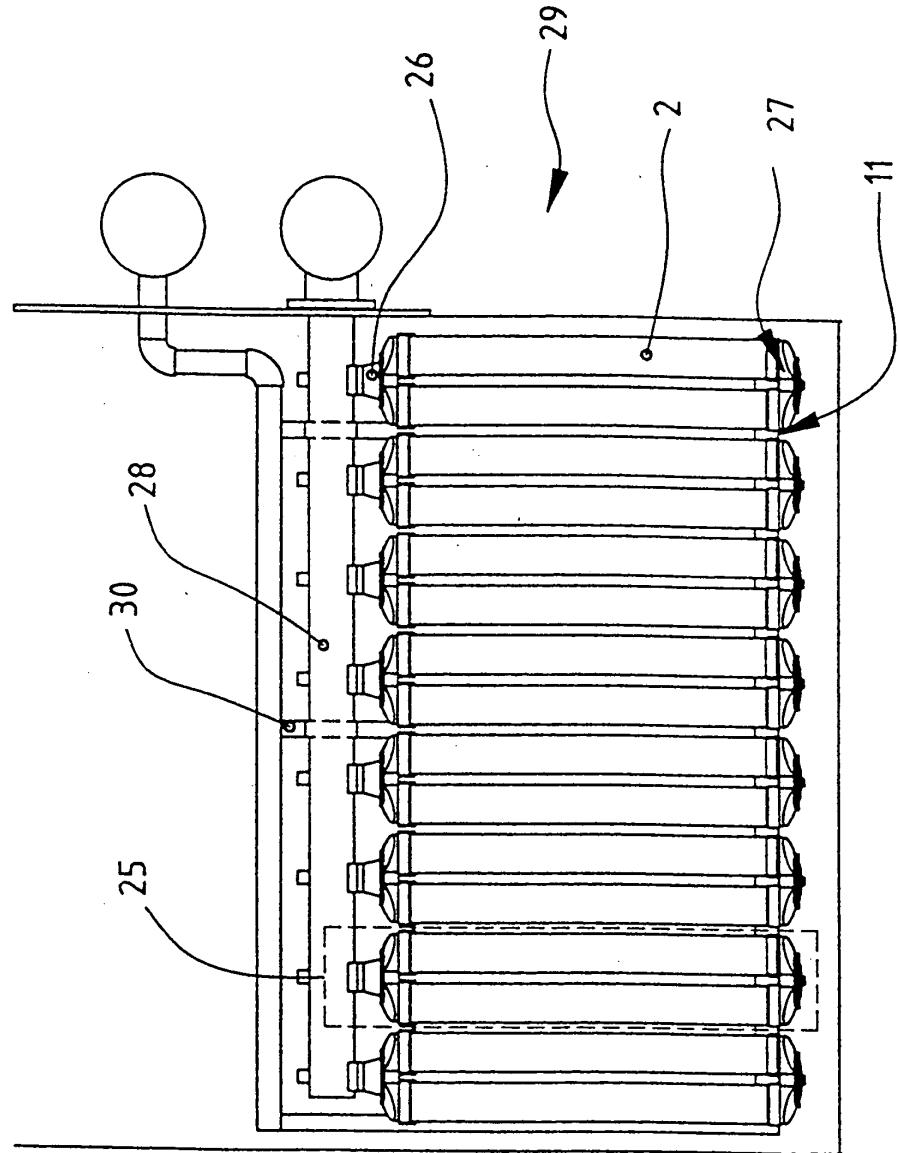


FIG 11

13/16

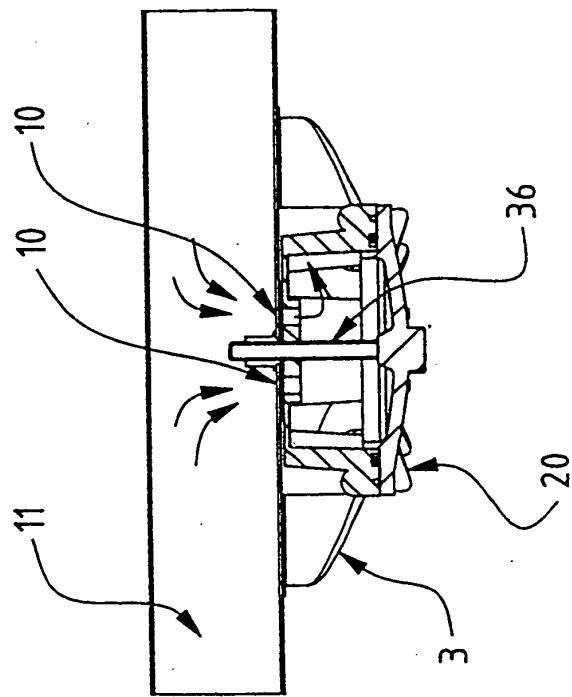


FIG 12 b

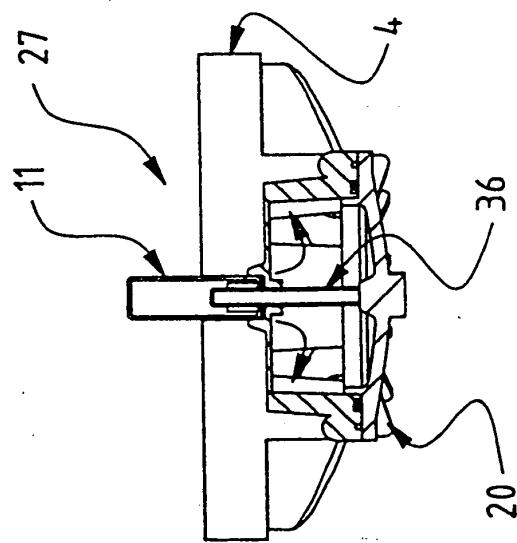


FIG 12 a

14/16

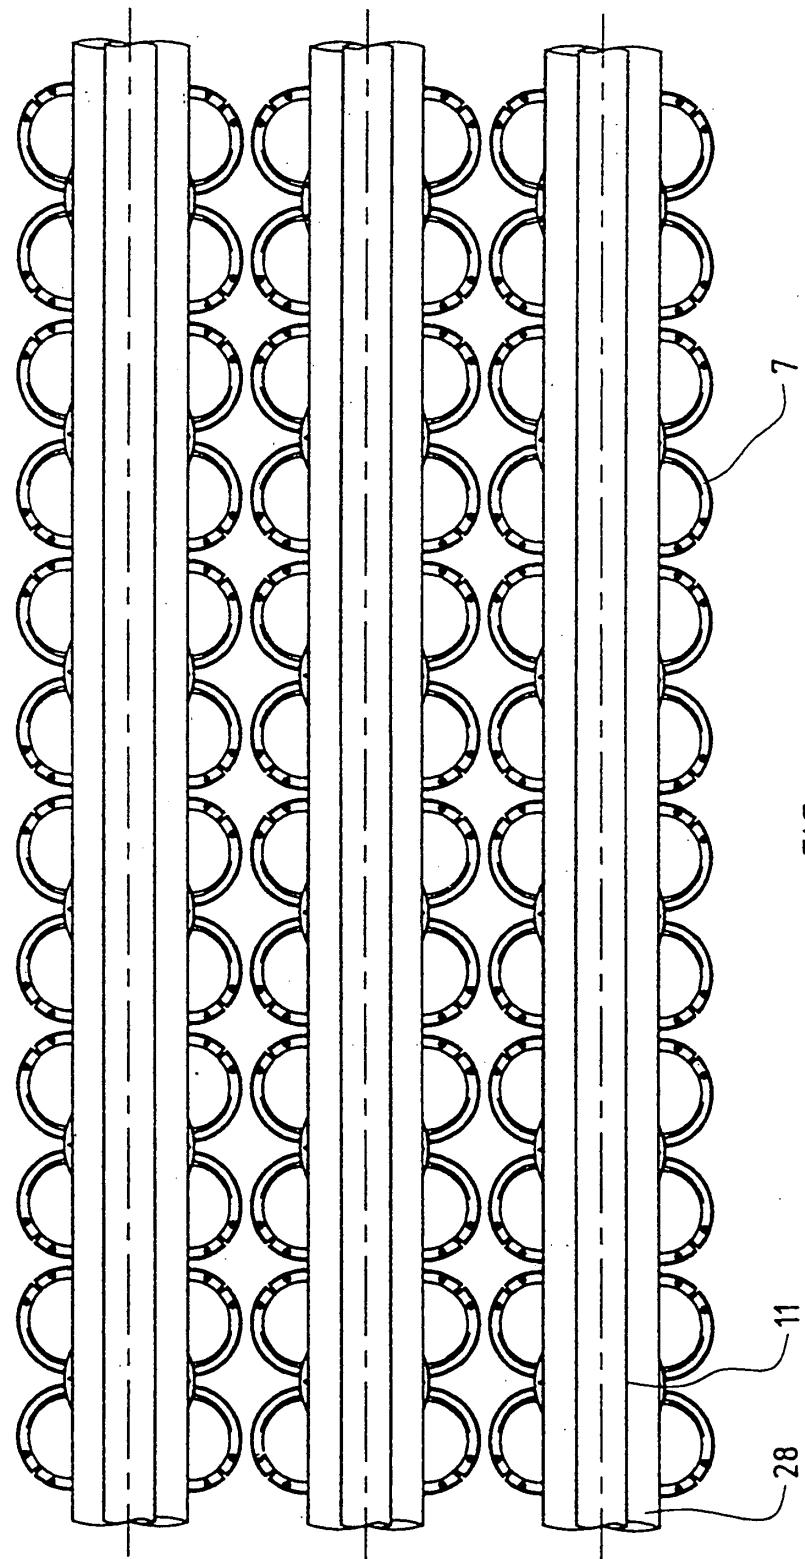


FIG 13

15/16

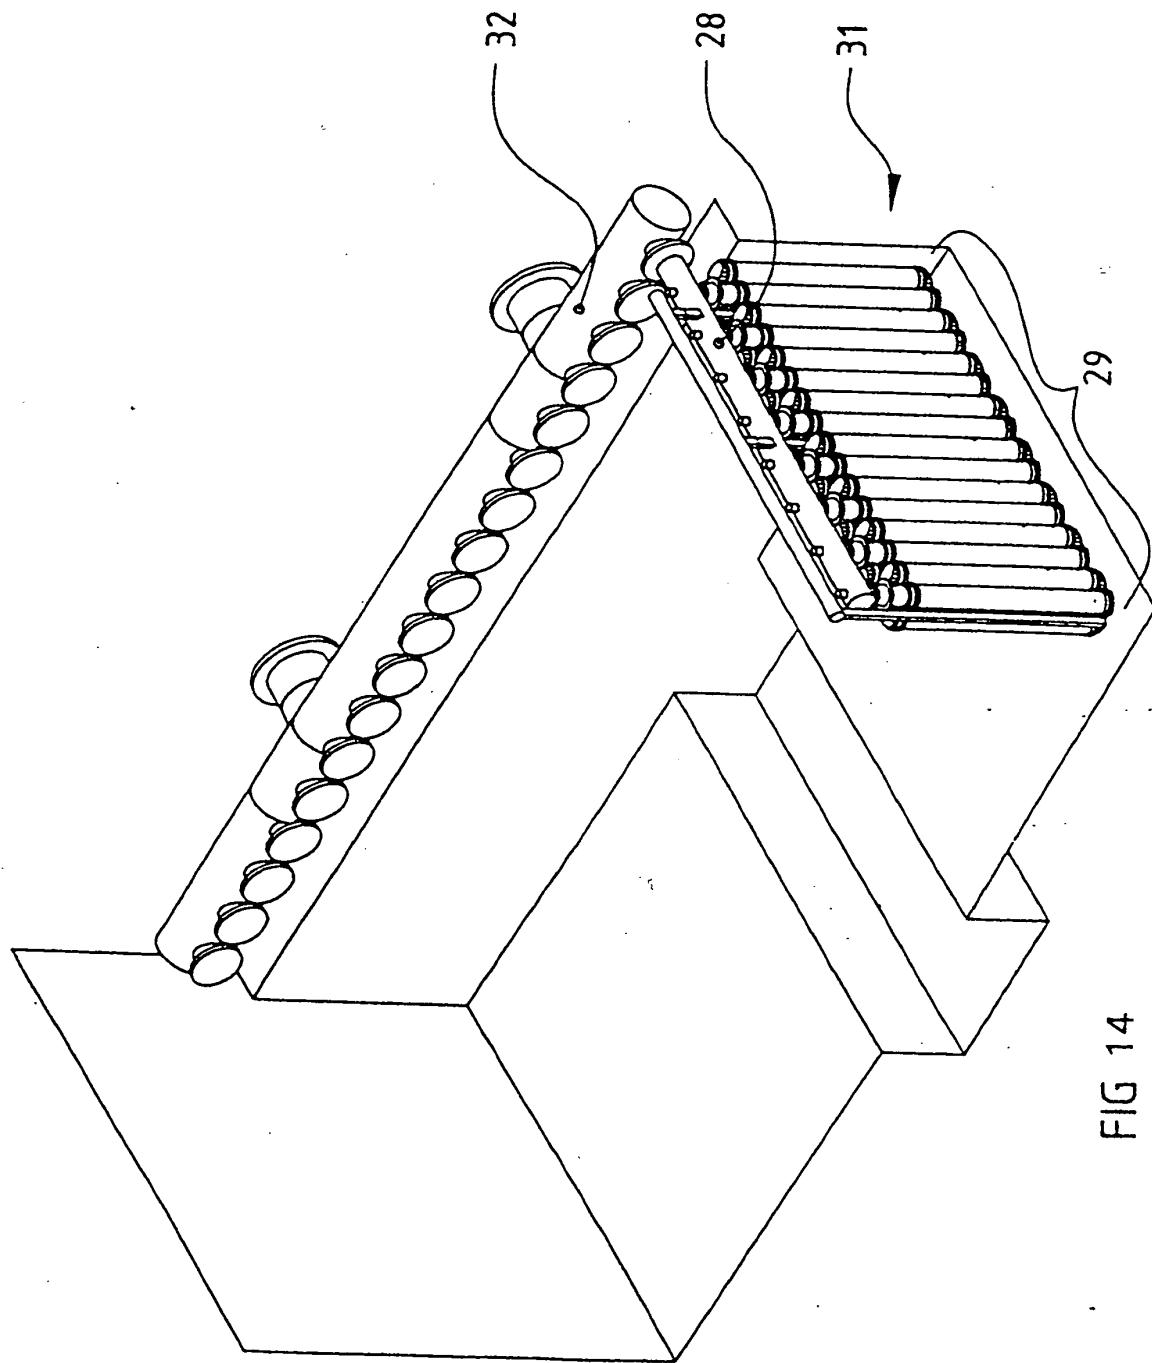


FIG 14

